

8-Port Video Switch

GVS881



- New modern concentric design with logical connector layout for quick and easy access
- Amplifies video signals increasing transmission distance
- Fast and convenient computer selection via push buttons or infrared (IrDA) remote control
- Full-featured wireless remote control snaps into base when not in use
- Hot plug capability, hot swappable, plug-n-play
- Extra-thin infrared handset allows easy storage in the unit
- Electronic switching for greater reliability and durability
- Displays the output of eight computers on a single monitor
- High Resolution Video- up to 2048 x 1536; DDC; DDC2; DDC2B Supports, VGA, SVGA, XGA and Multi-sync Monitors
- Easy installation - no software required - no configuration necessary

Reduce Meeting Time. IOGEAR's 8-Port Video Switch (GVS881), allows you to manage your meetings more effectively. It is an ideal solution for meetings and conferences with multiple presenters.


Connect the video switch to a projector or monitor with a VGA connector; have up to 8 laptops connected with presentations ready to go. Use the remote or push button to switch from one presenter to another. Hence, cutting down on meeting time by eliminating time-wasting plugging and unplugging of cables and uploading of files.

Presentations will run smoother and faster. IOGEAR's Video Switch also acts as a signal booster, increasing the distance of the video signal up to 215 feet.

Plus it is light-weight and portable for the mobile professional.



8-Port Video Switch

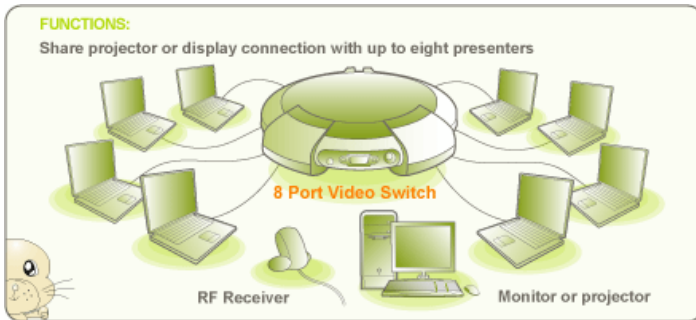

Product Requirements

- Macintosh Users - All Macs with analog VGA support
- PC Users - All PCs with analog VGA support VGA, SVGA, Multi-sync compatible Supports DDC, DDC2, DDC2B at Port 1

Package Contents

- 1 Video Switch (GVS881)
- 1 Remote
- 1 DC 9V Power Adapter
- 1 VGA Cable
- 1 User Manual
- 1 Registration/Warranty Card

Specifications

Function	GVS881	Dimensions	GVS881
LEDs		Unit Dimensions	
Power On	1	Width	6.7 in. (17 cm.)
Data	1 (Blue) Disabled	Height	7.4 in. (19 cm.)
ACT (Activity)	8 Online (Orange) /8 Selected (Green)	Depth	1.7 in. (4.5 cm.)
Port Selection	Push Button Switches /IrDA Remote Control	Unit Package Dimensions	
Video Resolution	1920 x 1440; DDC; DDC2; DDC2B	Width	10.5 in
Operating Temperature	5 - 40C (Celsius)	Height	8.75 in. (22.2 cm.)
Storage Temperature	-20 - 60C (Celsius)	Depth	3.75 in. (9.52 cm.)
Operating System Support	Computers with Analog VGA Display Support	Master Carton	
Humidity	0 - 80% RH (Non Condensing)	Width	9.5 in. (24.13 cm.)
VGA Bandwidth (-3db)	200 MHz	Height	11.5 in. (29.21 cm.)
Signal Type	VGA, SVGA, and Multisync monitors	Depth	21.25 in. (53.98 cm.)
Cable Distance	215 Feet (65.53 m.)	Master Carton Qty.	5
Connectors (Input)	8 x 15pin HDB Male	Weight	
Connectors (Output)	1 x 15pin HDB Female	Master Carton Wt.	15.25 lbs. (6.86 kg.)
Power Adaptor Part #		Unit Pack Wt.	1.5 lbs
for North America	# 0AD1-0209-101G	Unit Wt.	1 lbs
for Continental Europe	# 0AD6-1209-101G		
for UK	# 0AD4-3209-101G		
Power			
Voltage	AC 9V		
Amps	1A		